

POS 720 Series

15"/17" Metal POS Monitor for any harsh environment

POS 720 Series is an innovative Metal Touch Screen POS Monitor for harsh retail or hospitality environments. Its ultra slim front bezel, water and grease resistance, exquisite stainless steel enclosure, rugged construction and space-saving die-casting stand are indeed the best solution to any harsh environment. The POS720 series is also a powerful offering in Kitchen Video Systems (KVS) solutions. It is designed for larger chain stores, regional or local restaurant operators who appreciate the advantages of using a kitchen display rather than relying on kitchen printers. The POS720 Series can help operators reduce average quick serve times and increase table serve turns. All of this equals improved customer satisfaction-the best payoff.





Features



 Rugged metal housing and NEMA 4 / IP 65 water & dust proof front display



 Sealed rear cover and fan-less/no air-vent design for the harshest
environment




2. 15", 17" wide range display sizes



5. VESA mounting or Die-casting stand




Rich I/O ports provide excellent peripheral connectivity



6. Ultra slim 30mm thickness stepping design

POS 720 Series

System Application

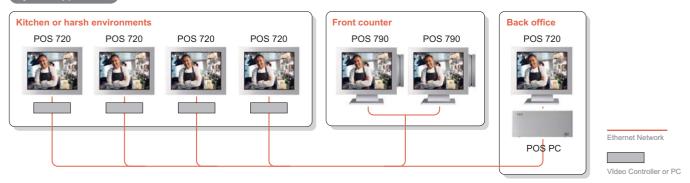

Specification

Model Name	POS 725	POS 727
LCD / Touch Panel		
LCD Size	15" TFT LCD	17" TFT LCD
Brightness	Up to 350 nits	Up to 420 nits
Maximal Resolution	1024 x 768	1280 x 1024
Touch Screen Type	Resistive / IR / temper glass	
External I/O Ports		
VGA	1	
PS/2	2 (1 x PS/2 in to PC, 1 x PS/2 out to MSR / Keyboard)	
OSD Button	5 (Power, Menu, Left, Right, Select)	
USB	2 x USB 2.0 (Type A), 1 x USB 2.0 (Type B to PC)	
Serial / COM	2 x COM (1 x DB-9/F type to PC, 1 x RJ-45 type to VFD)	
Metal Housing		
Housing Material	Stainless steel (default), SECC (optional)	
Dust & Water Proof	IP65 / NEMA 4 in front	
Stand	Die-casting	
Power Adapter	12V / 2.5A, 30W	12V / 5A, 60W
Peripheral		
Metal MSR	3 Tracks (PS/2)	
Metal Customer Display	Flush mount VFD (COM)	
Environment		
EMC & Safety	FCC Class A, CE, LVD	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	
Operating Humidity	5% ~ 95% RH non-condensing	
Storage Humidity	5% ~ 95% RH non-condensing	
Dust & Water Proof	IP65 / NEMA 4 in front bezel	
Dimension (W x D x H)	Stand (90° Angle): 386 x 250 x 370 mm	Stand (90° Angle): 411x 250 x 390 mm
	Stand (90° Angle): 15.2" x 9.8" x 14.6"	Stand (90° Angle): 16.2" x 9.8" x 15.4"
	Wall mount: 386 x 60 x 308 mm	Wall mount: 411 x 60 x 345 mm
	Wall mount: 15.2" x 2.4" x 12.1"	Wall mount: 16.2" x 2.4" x 13.6"
Weight (N.W. / G.W.)	11 kg / 12 kg	12 kg / 13 kg
Mounting	100 mm x 100 mm Standard VESA	

Product specifications subject to change without prior notice.

©2008 Flytech Technology Co., Ltd. Registered trademarks and trademarks are property of their respective owners. The specification is subject to change without prior notice. Flytech endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omissions. The development of Flytech products and services is continuous, and published information may not be up to date. It is important to check the current position with Flytech.



FLYTECH Technology Co., Ltd.

No.168, Sing-ai Rd., Neihu District, Taipei City 114, Taiwan Tel: 886-2-8791-4988 Fax: 886-2-8791-4966 E-mail: sales@flytech.com.tw www.flytech.com

U.S.A. - California

47825 Warm Springs Boulevard, Fremont, CA 94539, USA Tel: 1-510-257-5180 Fax: 1-510-257-5181 E-mail: sales@flytech.com
 China - Shanghai

 3F Building 39, No.333 Qin Jiang Rd., Shanghai 200233, P.R.China

 Tel: 86-21-5426-1555
 Fax: 86-21-5426-1001
 http://www.flytech.

Fax: 86-21-5426-1001 http://www.flytech.com.cn E-mail: sales@flytech.com.cn

China - Hong Kong

Room 01, 6/F, Block A, Tonic Industrial Centre, 26 Kai Cheung Rd., Kowloon Bay, Kowloon, Hong Kong Tel: 852-3525-5800 Fax: 852-2751-7447 http://www.flytech.com.hk E-mail: sales@flytech.com.hk Japan - Nagano Ken

2-48-14 Inada, Nagano-Shi, Nagano-Ken, Japan Post Zip Code: 381-0042 Tel: 81-26-259-4804 E-mail: sales@flytech.co.jp

S - 1008 - 0805 - P720E